

PRODUCT SPECIFICATION



LIGHT WEIGHT STACKER
SMALL BUT MIGHTY –
YOUR EVERYDAY LIFTING PARTNER

■ INTRODUCTION TO OIL CYLINDER



Integrated oil cylinder, sealed without oil leakage.

Fast and powerful lifting, high-performance hydraulic pump.

Long lifespan, built-in imported sealing ring, solves the problem of oil leakage.

Split type valve core, convenient for disassembly and maintenance.



■ MATERIAL INTRODUCTION

Manufactured with cold-bent seamless alloy steel tubes meeting national standards, powder-coated finish for daily rust protection.




■ DETAIL INTRODUCTION

Thickened fork, fork width can be adjusted left and right.



Reinforced spring with strong rebound

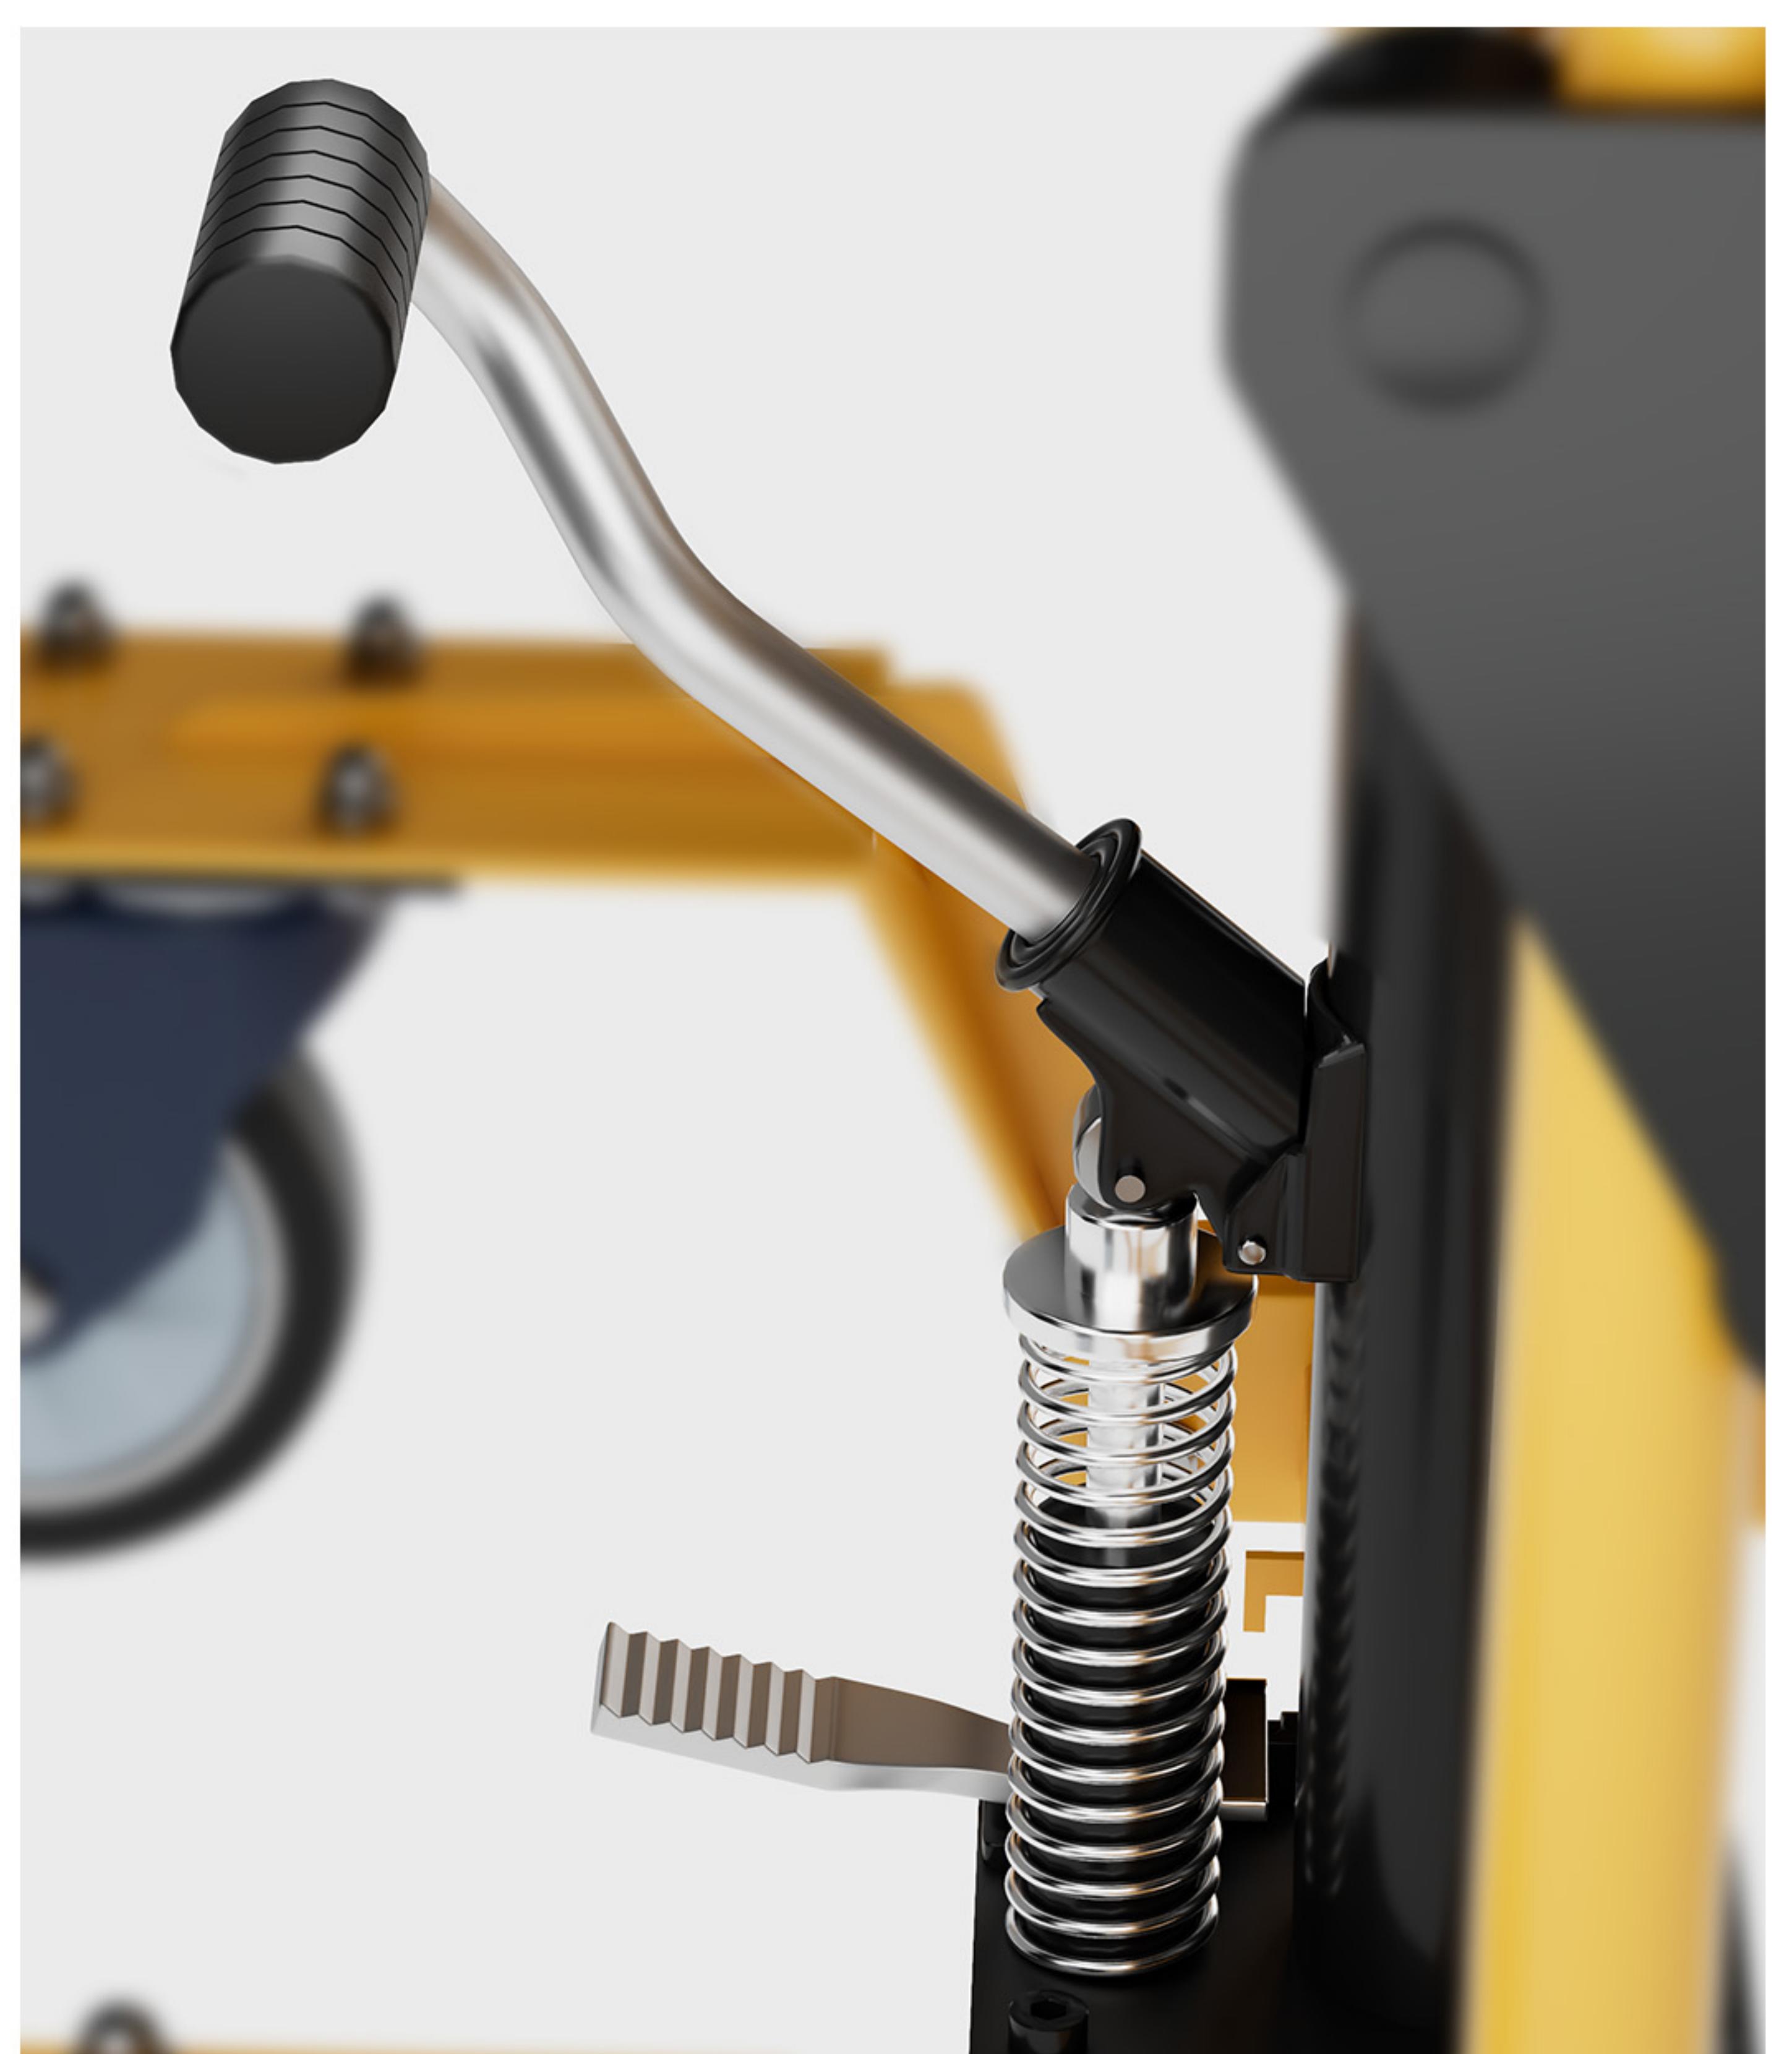

Foot pedal lifting, pedal pressure relief

Professional grade oil cylinder, combined with reinforced springs, saves time and effort.

■ WHEEL DESCRIPTION



Large Swivel Wheel

Features: It reduces damage to the ground, such as indoor floors, marble floors, etc. The large wheel universal joint can better protect the ground.



Small Swivel Wheel

Features: 360 degree rotation, silent, wear-resistant, shock-absorbing, with brake device, no need to adjust the direction of the vehicle significantly, improving work efficiency.



Fixed Pneumatic Wheel

Features: Buffer vibration, reduce noise, wheels that can walk in the wild for more stable movement.

■ FOLDABLE DESIGN

1. Strong flexibility, able to adapt to complex and narrow spaces
2. Ready to use and easy to access, convenient and effortless
3. Easy to fold, convenient for storage and transportation



■ SUPPORT EXPORT

1. Small size, high folding degree, can load more goods.
2. Adopting multi-layer protective coating to prevent rusting and corrosion of steel.
3. Implement tight arrangement to reduce space waste.
4. Customs locks that meet customs requirements.
5. Well designed internal cushioning and shock absorption system ensures safe arrival.



■ MODEL TYPES AND WHEELS



HS200C Large Swivel Wheel



HS200X Small Swivel Wheel



HS200A Fixed Wheel



HS200H Fixed Pneumatic Wheel

■ PARAMETER INTRODUCTION

Model	HS200A	HS200C	HS300A
Rated load / Kg	200	200	300
Fork width (mm)	515	515	515
Fork length / mm	535	535	535
Overall dimension/ mm	860*540*1210	950*540*1210	860*540*1210
Fork width inside / mm	250	125	250
Steering wheel diameter / mm	50	50	50
Fork lowered height /mm	65	65	90
Weight (kg)	45	43	51
Package	Honeycomb carton packaging	Wooden box and carton packaging	Carton and pearl cotton
volume	1280*640*1930	1280*640*1930	1290*1250*1080
Total Weight	535	695	515
Single packaging volume	1270*620*300	1270*620*300	1270*610*300
Single packaging weight	52	68	50
Quantity	10 units/pallet	10 units/pallet	10 units/pallet